



TRANSI-TRAY CABINETS

Standard Duty Non-Insulated

Models: CA63-IFB32 CA63-IFB49 CA71-IFB38 CA71-IFB58

Design Features

- 15" long 18 ga. stainless steel gravity latch
- Three stainless steel hinges
- Door can be secured in closed or fully open 270° position
- Pan support positions available on 1 1/2" or 1" spacing
- Front mounted tie bar reinforces cabinet and functions as handle when door is latched in open position
- Card holder mounted above door for easy visibility



Quality Construction

- Aluminum construction
- Interlocking extruded panels form easy-to-clean sides
- .190" thick aluminum base with welded corners
- One piece extruded aluminum side frames
- Extruded header bars (front & rear)
- Heavy-duty 14 ga. stainless steel "270° swing" hinges
- Heavy-duty plate type casters, all swivel, with 5" neoprene wheels; front two casters with brakes

Options & Accessories

- Perimeter bumper
- Corner bumpers
- 5" polyurethane casters
- 15" long gravity latch
- Push/pull handles
- Door hinging (left)

Warranty & Certifications

Parts and Service Warranty

- Protected by BevLes 2 year parts and 1 year service warranty

Certified by the following:




Mailing: 729 Third Ave., Dallas, TX 75226 • Shipping: 1938 Wyott Dr., Cheyenne, WY 82007
(800) 441-1601 • Fax: (214) 565-0976 • www.bevles.com • sales@bevles.com



TRANSI-TRAY CABINETS

Standard Duty Non-Insulated

Models: CA63-IFB32 CA63-IFB49 CA71-IFB38 CA71-IFB58

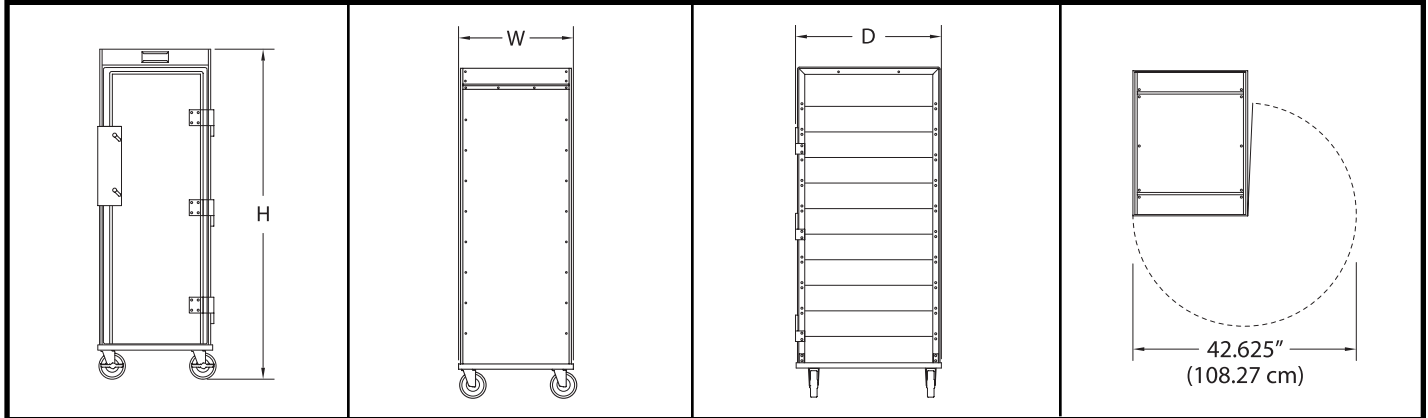

Model	Capacity			Dimensions			Ship Wt.	Act. Wt.
	18x26	12x20	SPC'G*	H	W	D		
CA63-IFB32	32	---	1½"	62.5" (160 cm)	22" (55.9 cm)	27.5" (69.9 cm)	105 lbs (47.6 kg)	84 lbs (38.1 kg)
CA63-IFB49	49	---	1"	62.5" (160 cm)	22" (55.9 cm)	27.5" (69.9 cm)	110 lbs (49.9 kg)	90 lbs (40.8 kg)
CA71-IFB38	38	---	1½"	71.5" (181.6 cm)	22" (55.9 cm)	27.5" (69.9 cm)	125 lbs (56.7 kg)	105 lbs (47.6 kg)
CA71-IFB58	58	---	1"	71.5" (181.6 cm)	22" (55.9 cm)	27.5" (69.9 cm)	132 lbs (59.9 kg)	115 lbs (52.2 kg)

Construction

- **Body:** .063 aluminum
- **Door:** .100 aluminum
- **Door Latch and Hinges:** 15" long 18 ga. stainless steel gravity latch; 3 heavy-duty 14 ga. stainless steel hinges with 270° swing
- **Base:** .190 aluminum with welded corners
- **Side Frame:** One Piece, heavy-duty extruded frame, custom designed for maximum strength and durability
- **Header Bar:** Front and rear custom extruded header bars securely stabilize side frames to top and back of cabinet
- **Tie Bar:** Heavy-duty extruded tie bar (1/2"x3/4"x18 1/4") attached horizontally at front of cabinet – may be utilized as a handle when door is secured in 270° open position
- **Card Holder:** 2"x5" aluminum card holder riveted to front header bar (above door)

Pan Support Assembly

- **Pan Supports:** Aluminum extrusion .075" thick with interlocking "V" seam to provide sanitary joint – 9/16" wide ledges on 1 1/2" or 1" centers

Casters

- Heavy-duty plate type casters, all swivel, with 5" neoprene wheels; front two casters with brakes

Shipping

- Freight Class: 125
- FOB: Cheyenne, WY 82007

* Note: Modifications involving casters or legs may affect height of equipment. Specifications subject to change without notice.



Mailing: 729 Third Ave., Dallas, TX 75226 • Shipping: 1938 Wyatt Dr., Cheyenne, WY 82007
 (800) 441-1601 • Fax: (214) 565-0976 • www.bevles.com • sales@bevles.com

5/2/05
#B403